


2887-M 1/4"-4"

2888-M 1/4"-4"

Iron Clip Gate Valve
2887-M Bronze Trim • 2888-M All Iron
114" - 2" 150 SWP -225 WoG t
2112" - 4" 125 SWP -175 WoG t
Inside Rising Stem • Solid Wedge Disc
Threaded Ends

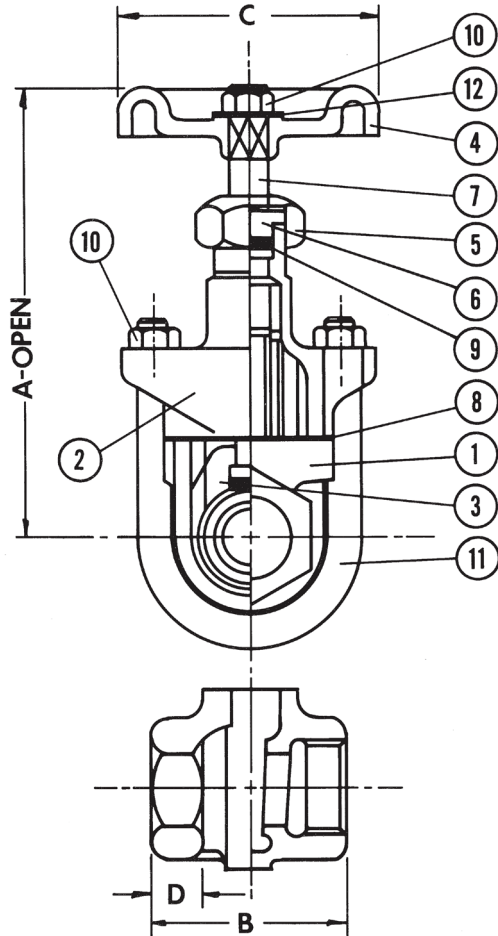

MATERIAL LIST			
No.	DESCRIPTION	MATERIAL	
		2887-M	2888-M
1	Body	Ductile Iron - A536	Ductile Iron - A536
2	Bonnet	Ductile Iron - A536	Ductile Iron - A536
3	Disc	Cast Bronze - B62	Ductile Iron - A536
4	Handwheel	Cast Iron - A126-B	Cast Iron - A126-B
5	Packing Nut	Ductile Iron - A536	Ductile Iron - A536
6	Gland	Brass - B16	410 SS
7	Stem	Brass - B16	410 SS
8	Gasket	Commercial	Commercial
9	Packing	Commercial	Commercial
10	Nut	Steel - A307-B	Steel - A307-B
11	U-Bolt	Steel - A307-B	Steel - A307-B
12	Name Plate	Aluminum	Aluminum

DIMENSIONS - INCHES/MILLIMETERS						
Units	Size	A	B	C	D	Cv
Inches mm	1/4 - 1/2	5.00 127	2.09 53.1	2.13 54.0	0.47 12	5
Inches mm	3/4	6.22 158	2.52 64.0	2.44 62.0	0.51 13	32
Inches mm	1	7.50 191	2.64 67.0	2.95 75.0	0.63 16	54
Inches mm	1 1/4	9.00 229	2.91 73.9	2.95 75.0	0.70 18	97
Inches mm	1 1/2	9.14 232	3.15 80.0	3.75 95.0	0.75 19	135
Inches mm	2	11.58 294	3.90 99.1	3.98 101.0	0.90 23	230
Inches mm	2 1/2	12.88 327	4.60 116.8	4.75 121.0	0.47 18	337
Inches mm	3	14.70 375	4.92 124.9	6.00 152.0	0.47 19	536
Inches mm	4	19.30 490	5.94 150.9	9.00 229.0	0.47 20	960

INNOVATION IN EVERY VALVE

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com. ⚠ State of California Prop 65
WARNING: Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.

MILWAUKEE VALVE